

Axial taping specifications


形状 Shape	寸法 Dimensions : mm							
	O	P	L ₁ -L ₂	T	Z	R	t	S
TS	26 ^{+0.5} ₋₀	5±0.3	1max.	6±0.5	1max.	0	4min.	0.5max.
TB	52 ^{+0.5} ₋₀	5±0.3	1max.	6±0.5	1max.	0	4min.	0.5max.
		10±0.3						

RSF Radial taping specifications

寸法 Dimensions : mm					
P	30±1	W ⁰	9±0.5	L ⁰	7max.
P ⁰	15±0.3	W ¹	6min.	t	0.4±0.05
F	7.5±0.8	W ²	1max.	t ⁰	0.6±0.3
L	5min.	H	18±1	t ¹	1.7max.
△h	0±2	H ⁰	6.5 ⁺¹ _{-0.5}	D	4±0.2
W	18±0.5				

	RSF12・RSMF1	RSF1・RSMF2	RSF2・RSMF3
L ¹	14max.	17max.	21max.
P ¹	3.25±0.5	3.75±0.5	6.75±0.5
P ²	6±1	8±1	10±1
R	9±1	11±1	15±1.5

Axial taping specifications

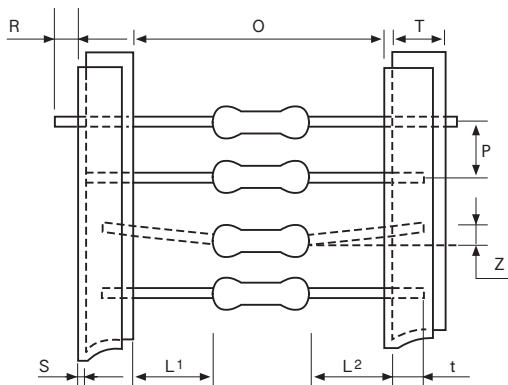

RSF Radial taping specifications

